


RFeyeArray

Array 300

DF and Spectrum Monitoring System

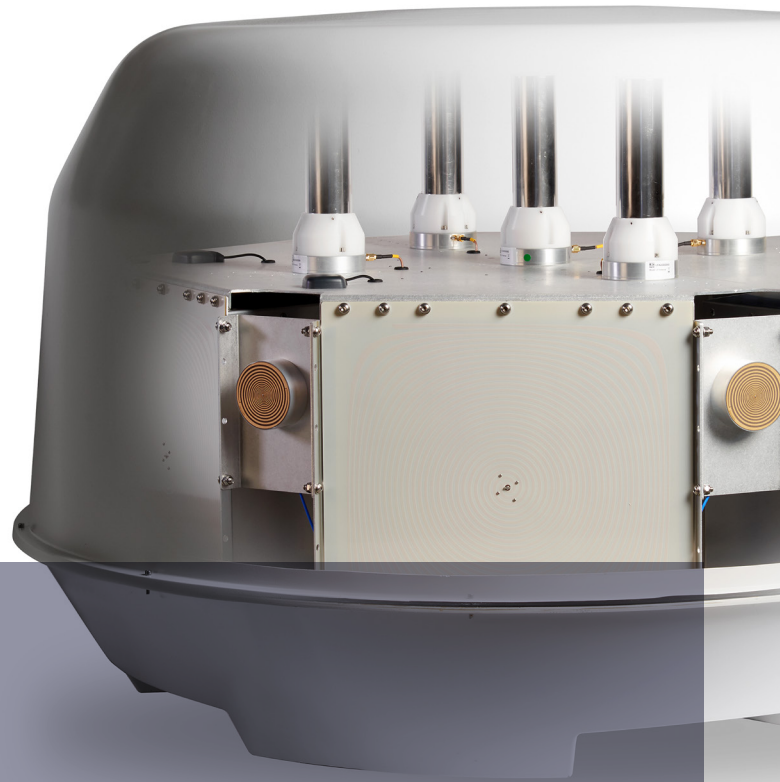

High performance twin channel system for simultaneous wideband radiomonitoring and direction finding.

The Array 300 is an intermediate sized system for vehicle mounted deployment or fixed installations. It is available in two different receiver configurations based on the RFeye Node 100-8 with 100 MHz IBW and 8 GHz upper frequency, or Node 100-18 with 100 MHz IBW and 18 GHz upper frequency.

The Array 300 uses a unique multi-layer approach that is more sophisticated and versatile than traditional direction finding. High performance spiral directional antenna modules are optimized for different frequency bands and arranged in multiple orientations. The Array is sensitive to the majority of incoming signal polarizations including all linear polarizations, allowing reliable detection of signals including those invisible to most DF systems.

Timing and synchronization features enable combined AOA, TDOA and POA techniques allowing all signal types in the range to be mapped, irrespective of signal power, bandwidth or frequency.

RFeye Array

Array 300 - Specifications

DF and Geolocation

Direction finding method	
Angle of arrival (AOA)	Switched directional arrays
Geolocation frequency range	
AOA DF	300 MHz to 8/18 GHz
VHF DF extender option	20 MHz to 300 MHz
Time difference of arrival (TDOA)	9 kHz to 8/18 GHz (external omni antenna)
Power on arrival (POA)	9 kHz to 8/18 GHz (external omni antenna)
DF coverage and accuracy	
Polarization sensitivity	All linear (circular polarized Rx antennas)
Azimuth coverage	360°
Antenna switch time	1.5 µs (typical)

Array 300 System

I/O	
Auxiliary RF input build options	3 or 4 x N-type or SMA (9 kHz to 8/18 GHz)
Omni antennas (option)	3 or 4 x external / 1 x internal (factory option)
Network	2 x GbE with PoE
USB	2 x USB 3.0

Location	Internal GPS module & antenna (standard)
Heading	Internal digital compass (option)
Data storage	
External SSD	via external USB interfaces
Internal SSD inside radome	512 GB SSD (per Node)
Size, weight and power	
Dimensions (Ø, h) with radome	1.1 m x 0.8 m (43 x 31 in)
Weight	80 kg (176 lbs)
DC, PoE	48 VDC
Power consumption	
Nominal	140 W
Environmental	
Operating temperature range	-30 to +55°C (-22 to 131°F)
Storage temperature range	-40 to +71°C (-40 to 160°F)
Ingress protection	Node & electronics: IP67, system: IP55

Receivers, Option 1: Array 300-8

Channels	
Dual	2 x Node 100-8
Frequency	
Range	9 kHz to 8 GHz
Sweep speed	
At 2 MHz resolution bandwidth	280 GHz/s typ.
At 61 kHz resolution bandwidth	245 GHz/s typ.
Noise figures at maximum sensitivity	
9 kHz to 0.1 GHz	10 dB typical
0.1 GHz to 2.4 GHz	6 dB typical
2.4 GHz to 6 GHz	7 dB typical
6 GHz to 8 GHz	8 dB typical
Signal analysis	
Instantaneous bandwidth	100 MHz
Tuning resolution	1 Hz
Sampling	
Resolution	16 bits per channel (I&Q)
Rate	125 MS/s I&Q

Receivers, Option 2: Array 300-18

Channels	
Dual	2 x Node 100-18
Frequency	
Range	9 kHz to 18 GHz
Sweep speed	
At 2 MHz resolution bandwidth	390 GHz/s typ.
At 61 kHz resolution bandwidth	320 GHz/s typ.
Noise figures at maximum sensitivity	
9 kHz to 0.12 GHz	12 dB typical
0.12 GHz to 6 GHz	8.5 dB typical
6 GHz to 10 GHz	10.5 dB typical
10 GHz to 18 GHz	13 dB typical
Signal analysis	
Instantaneous bandwidth	100 MHz
Tuning resolution	1 Hz
Sampling	
Resolution	16 bits per channel (I&Q)
Rate	125 MS/s I&Q



CRFS Inc
Chantilly, VA, USA
Tel: +1 571 321 5470
crfs.com
enquiries@crfs.com

CRFS Ltd
Cambridge, UK.
+44 1223 859 500
crfs.com
enquiries@crfs.com

CRFS and RFeye are trademarks or registered trademarks of CRFS Limited. Copyright 2021 CRFS Limited. All rights reserved. No part of this document may be reproduced or distributed in any manner without the prior written consent of CRFS. The information and statements provided in this document are for informational purposes only and are subject to change without notice. Document Number CR-000125-DS-23, June 2021.



FS 576625