


RFeye Node

50-8

Intelligent Wideband Receiver

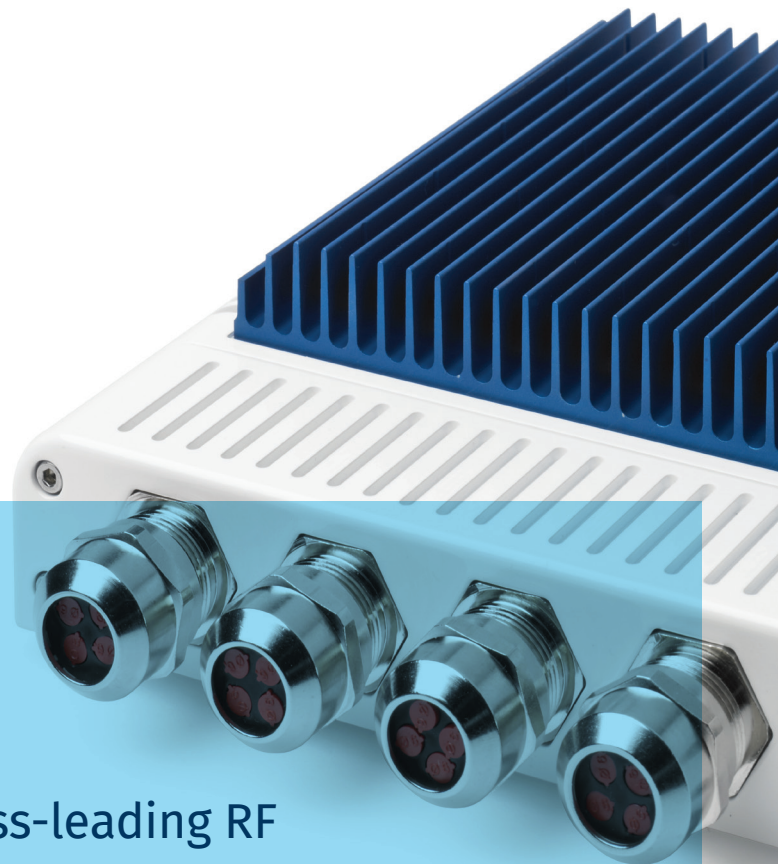

The RFeye Node 50-8 offers class-leading RF performance and extended instantaneous bandwidth for 24/7 ITU-compliant spectrum monitoring and radio geolocation.

The RFeye Node 50-8 uses the latest superheterodyne receiver technology to provide outstanding quality and performance at a highly competitive price. It is a complete spectrum monitoring and geolocation system designed for remote deployment in distributed networks both indoors and outdoors, including in hostile environments. Packaged in a compact, rugged and weatherproof housing, it has been optimized for size, weight and power (SWaP) and is simple to connect to power and network.

The Node 50-8 is characterized by outstanding phase noise, noise figure, channel retune time and spurious free dynamic range parameters, well above any other product in its class. It also offers all of the multi-mission capability of the RFeye product range allowing multiple concurrent measurements and geolocations to be performed and multiple users to connect simultaneously from remote locations. The Node 50-8 includes an on-board SSD for logging large data sets.

RFeye Node

50-8 Specifications

Single channel receiver

Switchable RF inputs	3 x SMA connectors
Frequency	
Range	9 kHz to 8 GHz
Noise figures at maximum sensitivity	
9 kHz to 0.1 GHz	10 dB typical
0.1 GHz to 2.4 GHz	6 dB typical
2.4 GHz to 6 GHz	7 dB typical
6 GHz to 8 GHz	8 dB typical
Phase noise	
Receiver input at 1 GHz	-130 dBc/Hz at 20 kHz offset, typ.
Receiver input at 8 GHz	-121 dBc/Hz at 20 kHz offset, typ.
Signal analysis	
Instantaneous bandwidth	50 MHz
Tuning resolution	1 Hz
Internal frequency reference (pre-calibration)	
Initial accuracy	±1.0 ppm typ.
Stability	±1.5 ppm typ.
Ageing	±0.5 ppm per year
Programmable sweep modes	
Sweep speed	151 GHz/s @ 2 MHz RBW 136 GHz/s @ 61 kHz RBW
User programmable modes	free run continuous, single timed, user trigger and adaptive
Trigger-on-event modes	user defined masks, actions and alarms
Sampling	
Resolution	16 bits per channel (I&Q)
Rate	125 MS/s I&Q
Third order intercept points with AGC	
0.1 GHz to 8 GHz	+35 dBm typical
Local oscillator	
Re-radiation	≤ -90 dBm typical
Frequency references	
Selectable	Internal, GPS or external
External input	10 MHz ±10 ppm
Output	10 MHz
GPS holdover (option)	Synchronisation Backup Module (SYN-SBM0002), ±1.5 µs / 8 hrs

Processor sub-system

CPU	Intel E3845 quad core
Level 2 cache	2 MB
Main memory	8 GB ECC DDR3
System disk	32 GB
I/O	
Network	1 x 1 GigE, with PoE
Universal Serial Bus	1 x USB 3.0, 1 x USB 2.0
2 x IEEE1394 expansion ports configurable as:	2 x SyncLinc, trigger input, external peripheral control
GPS antenna input	1 x SMA passive or active (3.3 VDC)
Data storage	
External flash disk	via USB interfaces
Internal storage	256 GB SSD
System software	
Boot firmware	BIOS
Operating system	Linux, kernel v 2.6
RFeye Node Control Protocol	NCP Server (NCPd)
Node Apps (optional)	Logger, Recorder, Threshold, Stations, Survey
Size, weight and power	
Dimensions (w, h, d) without end plate or heat sink	200 x 50 x 192 mm (7.9 x 2.0 x 7.6 inches)
Weight without end plate or heat sink	2.4 kg (5.3 lbs)
DC power or PoE	10 to 48 VDC
Power consumption	
Typical	25 W
Maximum	40 W
Environmental	
Operating temperature	-30 to +55 °C (-22 to 131 °F)
Storage temperature	-40 to +70 °C (-40 to 158 °F)
Ingress protection	IP67 (with optional end plate)



Cambridge RF Systems, Cambridge Research Park,
Building 7200, Beach Drive, Cambridge, CB25 9TL, UK
+44 1223 859 500 crfs.com

CRFS and RFeye are trademarks or registered trademarks of CRFS Limited. Copyright © 2017 CRFS Limited. All rights reserved. No part of this document may be reproduced or distributed in any manner without the prior written consent of CRFS. The information and statements provided in this document are for informational purposes only and are subject to change without notice. Document Number CR-000121-DS-21, July 2018.



FS 576625